RSTC

RS-PT14B

UHF Tire Patch Tag (External)

RSTC

RS-PT14B UHF Tire Patch Tag (External)

This tag developed to track finished tire, with unique identification number to prevent tire theft and cloning, It will last the lifetime of the tire. It should be attached outside the sidewall of the tire with vulcanizing agent, mainly used for bus tire, truck tire, trailer tire, etc.

Specification

Physical Features	
Material	Rubber
Dimensions	38×38×2.5mm
Weight	4.7g
Working Temp	-40~+85℃
Storage Temp	-40~+230℃

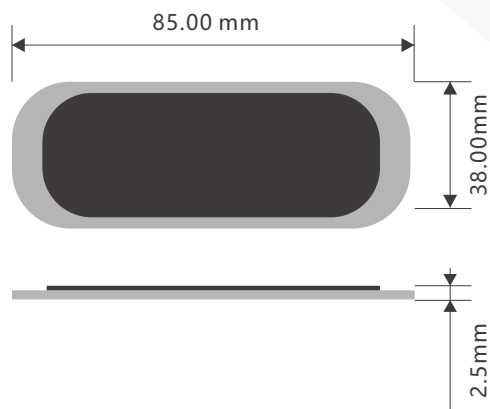| RFID Features	
RFID Standard	ISO/IEC 18000-6C (EPC C1G2)
Chip Type	Aline Higgs 3/9
Memory	H3: User -512 bits; EPC - 96 bits; TID - 32 bits H9:User -128 bits; EPC - 96 bits; TID - 48 bits
Read Range (Fixed Reader)	0.9m

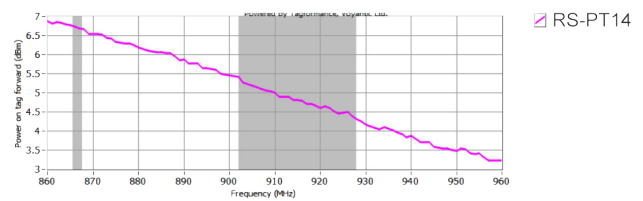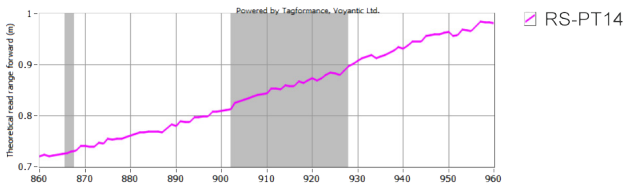| Other Features	
Data Storage	> 10 years
Re-write	100,000 times
Installation	Stick by vulcanizing agent (the same as tire repair)
Customization	Encoding, Designing, etc.
Package	100pcs/bag
Application	● Oil & Gas & Mining ● Industry equipment ● Cargo Container Tracking ● Logistics and warehouse, etc.

Dimensions

85.00 mm

38.00mm

2.5mm

RSTC

RS-PT14B
UHF Tire Patch Tag (External)

Read Range

Applications

TIRE FACTORY CONTROL

AUTOMOBILE FACTORY TIRE TRACKING

TIRE ASSET TRACKING

LOGISTIC VEHICLE MANAGEMENT

RuiSing Technology Company (Hong Kong) Limited

www.rstc-hk.com   +86-755-2692 2853   sales@rstc-hk.com

HONGKONG Unit D16/F, One Capital Place, 18 Luard Road, Wan Chai

SHENZHEN 9/F, Xinjing Mansion, Xinqu Blvd, Longhua District